

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number  
**WO 02/16983 A1**

(51) International Patent Classification<sup>7</sup>: **G02B 6/16**

[AU/AU]: 102/38 Refinery Drive, Pyrmont, NSW 2006 (AU). **VAN EIJELENBORG, Martijn** [AU/AU]; 2/12 City Road, Chippendale, NSW 2008 (AU).

(21) International Application Number: **PCT/AU01/00890**

(22) International Filing Date: **20 July 2001 (20.07.2001)**

(74) Agent: **GRIFFITH, Hack**: GPO Box 4164, SYDNEY, NSW 2001 (AU).

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
PQ 9689      25 August 2000 (25.08.2000)      AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **THE UNIVERSITY OF SYDNEY** [AU/AU]; Parramatta Road, Sydney, NSW 2006 (AU).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: and

(75) Inventors/Applicants (*for US only*): **BASSETT, Ian** [AU/AU]; 60 Milray Avenue, Wollstonecraft, NSW 2065 (AU). **FLEMING, Simon** [AU/AU]; 14 Goodlet Close, Lane Cove West, NSW 2066 (AU). **SCEATS, Mark**

[Continued on next page]

(54) Title: **OPTICAL WAVEGUIDE FIBRE**

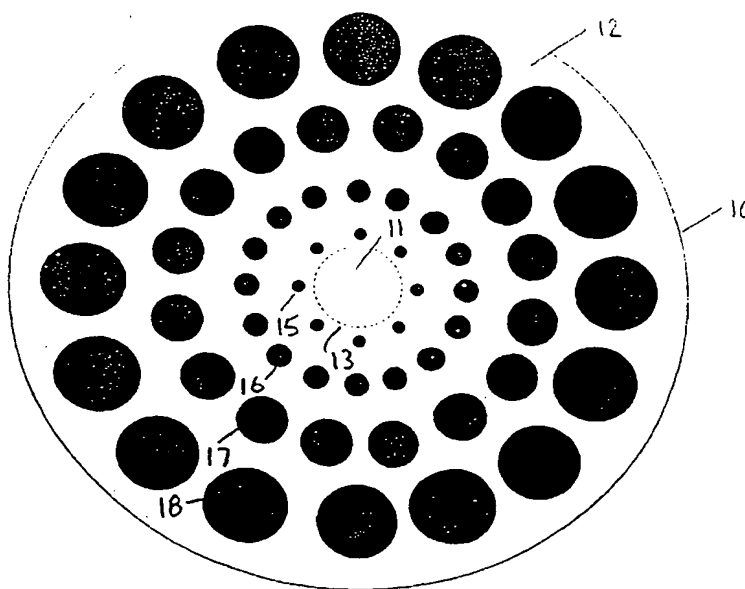

(57) Abstract: An optical fibre (1) having at least one longitudinally extending light guiding core region (11), a longitudinally extending core-surrounding region (12), and a plurality of light confining elements (15, 16, 17, 18), such as, for example, channel-like holes, located within the core-surrounding region (12). The light confining elements (15, 16, 17, 18) extend in the longitudinal direction of the core region and are located geometrically in zones that surround the core region. The aggregate cross-sectional area defined by the light confining elements within the respective zones increases with increasing radial distance of the zones from the core region. A preform for use in manufacture of the optical fibre is also defined.

WO 02/16983 A1

WO 02/16983 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## OPTICAL WAVEGUIDE FIBRE

Field of the Invention

This invention relates to an optical waveguide fibre  
5 that is formed in a manner to exhibit low bending loss.  
The invention has particular application to the class of  
optical fibres that are known as photonic crystal fibres  
(PCF's) or holey fibres and the invention is hereinafter  
described in the context of that class of fibre. However,  
10 it will be understood that the invention does have broader  
application.

Background of the Invention

In a photonic crystal fibre, light is guided through  
15 a core region of the fibre by light guiding holes that are  
disposed geometrically around the core region and extend  
in the longitudinal direction of the core region for the  
length of the fibre. Photonic crystal fibres exhibit  
properties that are not available in conventional fibre  
20 design. For example, it has been demonstrated that  
silica-air photonic crystal fibre can be formed to exhibit  
single mode guiding independently of the transverse  
optical intensity profile ("spot size") and wavelength.

For many applications it is desirable that single  
25 mode photonic crystal fibre be formed to provide a large  
spot size, to allow for high power transmission without  
concomitant non-linear effects, to facilitate splicing and  
to facilitate in/out coupling of light. However, a  
significant problem that is encountered with photonic  
30 crystal fibre, especially when the fibre is designed to  
exhibit a large spot size, is that bending losses are very  
large, even when the fibre is bent around what might  
otherwise be considered to be a modest radius of  
curvature. Thus, it can be shown that, in the case of a  
35 photonic crystal fibre having a conventional structure,

- 2 -

the critical bending radius increases with the third power of the spot size.

Mechanical bending of an optical fibre effectively modifies the refractive index profile of the fibre. That is, mechanical bending exerts strain on the fibre material, causing the material on the inside of the neutral axis of the bend to be subjected to compressive stress and causing the material on the outside of the neutral axis to be subjected to tensile stress. These conditions induce a change in the refractive index profile as a consequence of the elasto-optic effect and, at a certain radius of curvature, this stress-induced refractive index change reaches the same order of magnitude as the refractive index difference between the core and core-surrounding regions in the unbent fibre. This is the critical radius and it represents the minimum allowed bending radius below which light will not properly be confined to the core region of the fibre, resulting in large losses.

To achieve a single mode propagation in a photonic crystal fibre, especially in the case of a large spot size fibre, a very small difference in the effective refractive index of the core and the cladding is required. This results in the fibre being very vulnerable to bending losses, whether caused by bending induced stress or by the geometric change created by a bend.

#### Summary of the Invention

A fibre design that will minimise the above stated problem and provide a fibre that exhibits a relatively low bending loss.

Broadly defined, the present invention provides an optical fibre having:

- 3 -

(a) at least one longitudinally extending light guiding core region,

(b) a longitudinally extending core-surrounding region, and

5 (c) a plurality of light confining elements located within the core-surrounding region.

The light confining elements extend in the longitudinal direction of the core region and are located geometrically in zones that surround the core region. Also, at least a  
10 majority of the light confining elements have a refractive index that is less than that of the material of which the core-surrounding region is composed, and the aggregate cross-sectional area defined by the light confining elements within the respective zones increases with  
15 increasing radial distance of the zones from the core region.

As a consequence of the aggregate cross-sectional area of the light confining elements within the respective zones increasing with radial distance from the core  
20 region, the core-surrounding region will exhibit an average refractive index throughout its volume that decreases with increasing radial distance from the core region. However, the decrease in the average refractive index need not be linear and, thus, the aggregate cross-  
25 sectional area of the light confining elements in adjacent ones of the zones may vary positively and negatively provided that an average increase occurs with radial distance from the core region.

30 The invention also provides a preform used in the manufacture of the above-defined optical waveguide, the preform having

- 4 -

- (a) at least one longitudinally extending core region,
  - (b) a longitudinally extending core-surrounding region, and
  - (c) a plurality of elements located within the core-surrounding region, the elements extending in the longitudinal direction of the core region and being located geometrically in zones that surround the core region.
- 10 At least a majority of the elements have a refractive index that is less than that of the material of which the core-surrounding region is composed, and the aggregate cross-sectional area defined by the elements within the respective zones increases with increasing radial distance
- 15 of the zones from the core region.

#### Preferred Features of the Invention

In optical fibre, in order that the aggregate cross-sectional area of the light confining elements within the respective zones might increase with increasing radial distance of the zones from the core region, the number of light confining elements within the respective zones may increase with radial distance of the zones from the core region. However, it is preferred that the cross-sectional area of the individual light confining elements within the respective zones will increase with radial distance of the zones from the core region.

The light confining elements within the core-surrounding region may be positioned geometrically so as to provide for non-uniform or, preferably, uniform reduction in the effective refractive index with increasing radial distance from the core region. In the former, less preferred, case the reduction in refractive

index may be arranged to vary with different radial angles from the core.

The core-surrounding region may be is composed of a material that is the same as that of which the core region is composed of and the invention is hereinafter described in this context. However, it will be understood the core and core-surrounding regions may be composed of different materials having different refractive indexes, for example, doped silica in the case of the core-region and undoped silica in the case of the core-surrounding region. Also, it will be further understood that, when the light confining elements are formed in a lattice-like structure, so as to create one or more photonic bandgap(s) in the core surrounding region, the core region may be formed as a hollow core or from a material that has a lower refractive index than that of the core-surrounding material.

The optical fibre preferably has a single longitudinally extending light guiding core region, and the invention is hereinafter described in this context. However, it will be appreciated that multi-core structures may be formed with the plural cores sharing a common core-surrounding region.

The light confining elements preferably comprise longitudinally extending channel-like holes which, depending upon specific requirements, may be evacuated, be occupied by air or be filled with other (liquid or gaseous) fluids. However, some or all of the light confining elements may comprise filaments of solid material such as glass or a polymeric material that has a refractive index less than that of the core-surrounding region.

- 6 -

The light confining elements when in the form of channel-like holes, may have any cross-sectional shape. They may be circular in cross-section, although some or all of the holes may have elliptical cross-sections or arcuate cross-sections. As a further alternative, some or all of the holes may have polygonal cross-sections.

The light confining elements preferably are distributed about the core region, that is within the respective zones, to surround the core region in a spatially uniform or symmetrical manner. For example, the light confining elements may be distributed around a plurality of circles (that define the respective zones) which are all concentric with the axis of the core region. As a further alternative, the light confining elements as seen in cross-section may be distributed geometrically in regular arrays, for example, in polygonal honeycomb-like arrays or, as indicated previously, in lattice like arrays.

The light confining elements most preferably are distributed about the core region, within the respective zones, in circularly concentric or polygonally concentric arrays. The invention will be more fully understood from the following description of alternative forms of optical fibre that embodied the invention. The description is provided with reference to the accompanying drawings.

#### Brief Description of the Drawings

In the drawings, Figures 1 to 4 show diagrammatic representations of the transverse cross-section of optical fibres that incorporate different embodiments of the invention.



Detailed Description of the Invention

As illustrated in Figure 1, the optical fibre 10 comprises a longitudinally extending light guiding core region 11 and a longitudinally extending core-surrounding region 12. The core region 11 is indicated as being defined by the broken circle 13 for convenience of reference, but it will be understood that the core region 11 need not necessarily have any clearly defined outer margin.

10 In one form of the invention, the core region 11 and the core-surrounding region 12 are homogeneous in the sense that they are both formed from the same material without any interface between the two regions. Any optically transparent material may be employed in forming  
15 the core and core-surrounding regions, including doped silica and undoped silica.

A plurality of light confining elements 15, 16, 17 and 18 in the form of longitudinally extending channel-like holes is located within the core-surrounding region  
20 12, and each of the light confining elements 15 to 18 extends for the full length of the optical fibre. The light confining elements are positioned geometrically in zones that surround the core region 11 and, as illustrated, are positioned uniformly in four circular  
25 zones that are concentric with the axis of the core region. However, it is to be understood that, depending upon the requirements of the fibre and the spot-shape required of guided light, the light confining elements 15 to 18 need not be positioned in a circularly symmetric or  
30 other symmetric manner.

The light confining elements 15 to 18 as formed will normally be occupied by air. However, they may be evacuated, be filled with another fluid or be constituted by filaments of a solid material such as silica, doped  
35 silica or a polymeric material, depending upon the optical properties required of the optical fibre.

Whatever their form, a majority of the light guiding

elements 15 to 18 must exhibit a refractive index that is lower than that of the material from which the core-surrounding region 12 is formed, so that the core-surrounding region as a whole will exhibit an average  
5 refractive index throughout its volume that is less than that of the core region 11. Thus, the light confining elements function collectively to confine light to the core region of the optical fibre.

Each of the inner zone light guiding elements 15,  
10 when in the form of a channel-like hole, will normally have a diameter within the range of 0.1  $\mu\text{m}$  to 10  $\mu\text{m}$ , and adjacent elements 15 will normally have a centre spacing in the order of 2  $\mu\text{m}$  to 20  $\mu\text{m}$ , depending upon the size of each hole.

15 The first ring or zone of light confining elements 15 is constituted by channel-shaped holes having very small diameters, and the hole size increases in the subsequently larger (concentric) rings or zones of channel-like holes 16, 17 and 18. This provides the required weak index-  
20 difference guiding in the core region 11 of the fibre, ensuring single moded transmission, whilst the outer rings of the larger holes (which provide the larger index difference) protect against leakage when the fibre is bent.

25 In addition to the use of the arrangement shown in Figure 1 to reduce bending losses, the shape and size of the channel-like air holes that constitute the light confining elements may be utilised to reduce mechanical stresses and, at the same time tailor index grading in the  
30 fibre material. The channel-like holes will normally be occupied by a medium (e.g. a vacuum, air or other gas) that has a much greater elasticity than the material that immediately surrounds the holes. Therefore, the mechanical stresses due to bending of the optical fibre  
35 will be relieved by the deformation of the holes, this reducing the stress induced refractive index changes in the fibre material and thus, further, the bending losses.

The optical fibres that are shown in cross-section in Figures 2 and 3 illustrate variations of that which is shown in Figure 1 and provide the optical fibres with characteristics to meet differing requirements. In the case of the fibre shown in Figure 2, an innermost ring of circular-section channel-form holes 15 is provided, but this is surrounded by concentric rings of elliptical-form channel-like holes 19, 20 and 21. However, the structure still exhibits circular symmetry.

10 In contrast to the arrangement shown in Figure 2, that which is shown in Figure 3 exhibits different symmetries about the X-X and Y-Y axes. In this case the core region 11 is surrounded by two concentric rings of light confining elements 15 and 16, with the outer ring 16  
15 being in part surrounded by an incomplete ring of channel-like holes 17. Then, in addition to the provision of two elliptical holes 20, two arcuate-form channel-like holes 22 are provided within the core-surrounding region 12.

Figure 4 shows a further optical fibre 10 which embodies the features of the invention and the arrangement illustrated has a superficial similarity with that which is shown in Figure 1. However, in the case of the optical fibre as shown in Figure 4, two core regions 11A and 11B are provided, each of which is surrounded by the core-surrounding region 12. Also, each of the core regions 11A  
25 and 11B is surrounded by inner rings of light guiding regions 15 and 16, and subsequent light guiding elements in the form of channel-like holes 17 and 18 are located within the common core surrounding region 12 and are  
30 shared by both of the core regions 11A and 11B.

The various optical fibres as described and illustrated in the various drawings may be formed in various ways. For example, they may be drawn from preforms that are fabricated from a single silica material  
35 or concentric regions of doped silica material.

Variations and modifications may be made in respect of the optical fibre in its various forms without

- 10 -

departing from the scope of the invention as defined in the appended claims.

The claims defining the invention are as follows:

1. An optical fibre having:

(a) at least one longitudinally extending light guiding  
5 core region,

(b) a longitudinally extending core-surrounding region,  
and

(c) a plurality of light confining elements located  
within the core-surrounding region, the light confining  
10 elements extending in the longitudinal direction of the  
core region and being located geometrically in zones that  
surround the core region, at least a majority of the light  
confining elements having a refractive index that is less  
than that of the material of which the core-surrounding  
15 region is composed, and the aggregate cross-sectional area  
defined by the light confining elements within the  
respective zones increasing with increasing radial  
distance of the zones from the core region.

2. The optical fibre as claimed in claim 1 wherein the  
20 number of light confining elements within the respective  
zones increases with radial distance of the zones from the  
core region.

3. The optical fibre as claimed in claim 1 wherein the  
cross-sectional area of the individual light confining  
25 elements within the respective zones increases with radial  
distance of the zones from the core region.

4. The optical fibre as claimed in any one of the  
preceding claims wherein the light confining elements  
within the core-surrounding region are positioned  
30 geometrically so as to provide for linear reduction in  
effective refractive index with increasing radial distance  
from the core region.

- 12 -

5. The optical fibre as claimed any one of the preceding claims wherein the core-surrounding region is composed of a material which is the same as that of which the core region is composed .

5 6. The optical fibre as claimed in any one of the claims 1 to 4 wherein the materials from which the core and the core-surrounding regions are formed are different.

7. The optical fibre as claimed in claimed 5 or 6 wherein the core region is formed at least in part as a  
10 hollow core.

8. The optical fibre as claimed in any one of the preceding claims wherein the light confining elements comprise longitudinally extending channel-like holes.

9. The optical fibre as claimed in any one of the  
15 preceding claims wherein the light confining elements are distributed about the core region in a symmetrical manner.

10. The optical fibre as claimed in any one of the preceding claims wherein the light confining elements are distributed around a plurality of circles which are all  
20 concentric with the axis of the core region.

11. The optical fibre as claimed in any one of the preceding claims wherein the light confining elements as seen in cross-section are distributed geometrically in regular arrays.

25 12. The optical fibre as claimed in claim 11 wherein the light confining elements as seen in a cross-section are distributed in polygonal honeycomb-like arrays.

13. The optical fibre as claimed in any one of the preceding claims wherein the light confining elements are  
30 distributed about the core region, within the respective zones, in circularly concentric or polygonally concentric arrays.

14. A preform used in the manufacture of the above-defined optical waveguide, the preform having

- (a) at least one longitudinally extending core region,  
(b) a longitudinally extending core-surrounding region,  
and a plurality of elements located within the core-  
surrounding region, the elements extending in the  
longitudinal direction of the core region and being  
located geometrically in zones that surround the core  
region, at least a majority of the elements having a  
refractive index that is less than that of the  
material of which the core-surrounding region is  
composed, and the aggregate cross-sectional area  
defined by the elements within the respective zones  
increases with increasing radial distance of the  
zones from the core region.

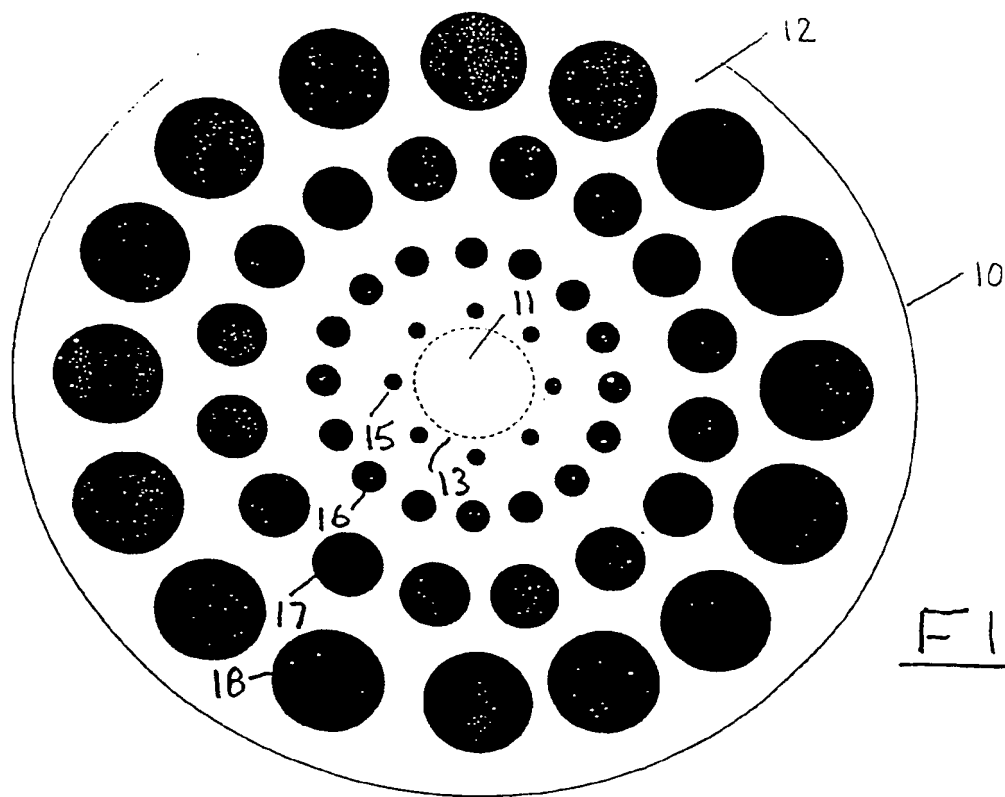
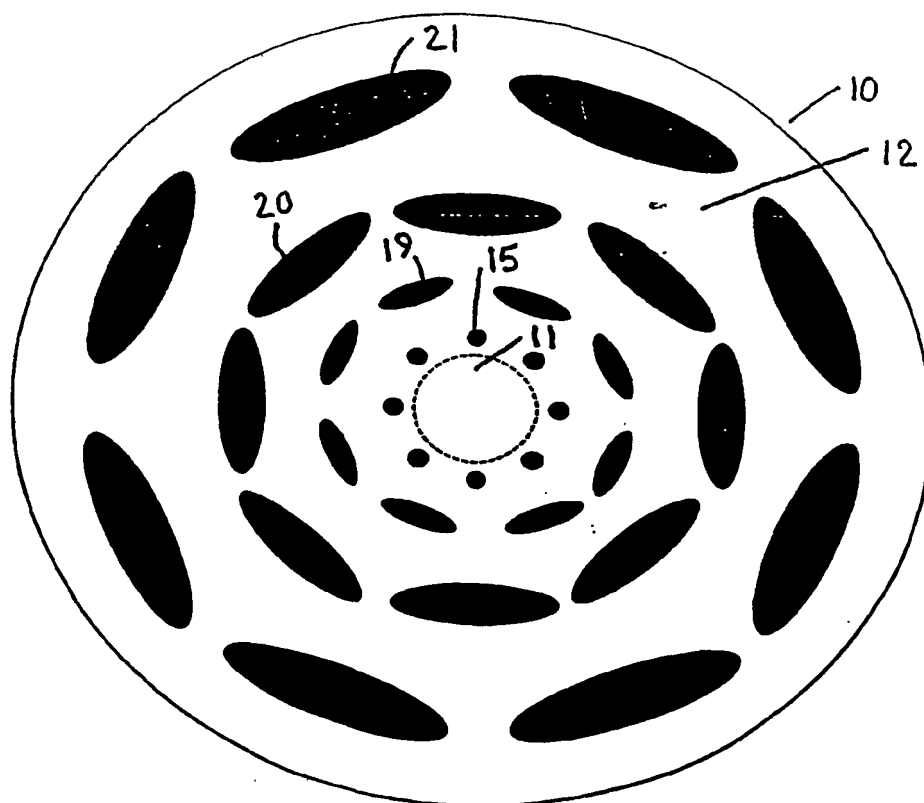


FIG. 2






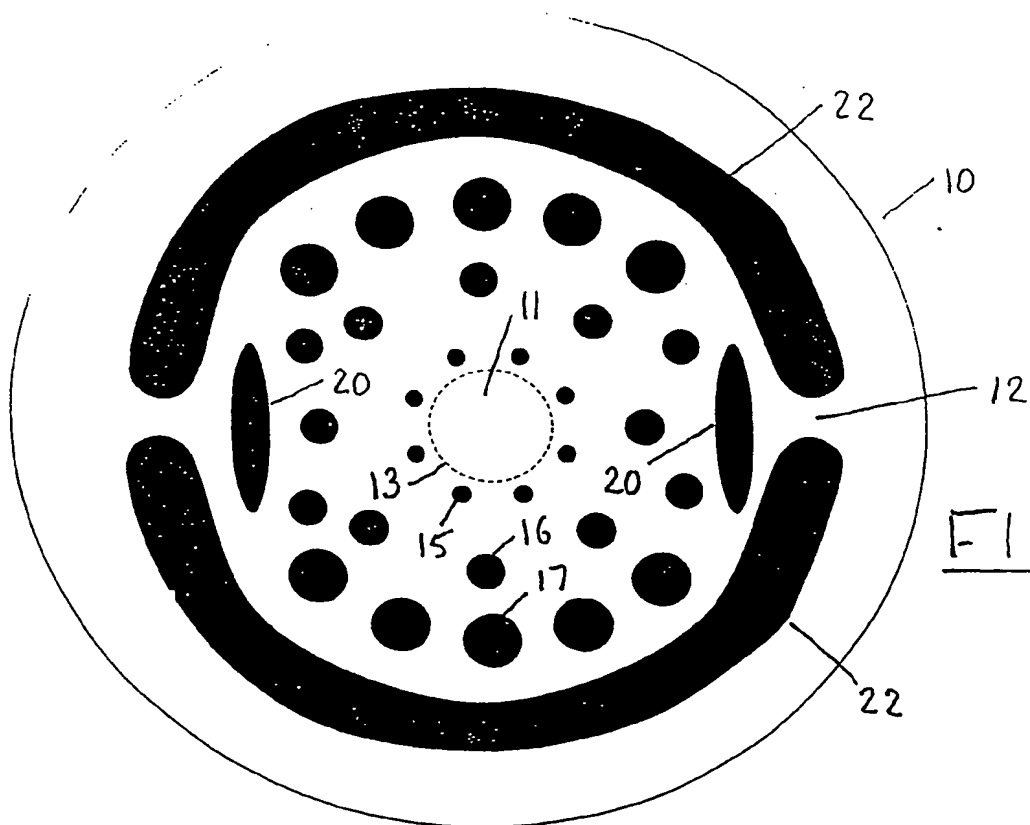


FIG. 3

FIG. 4

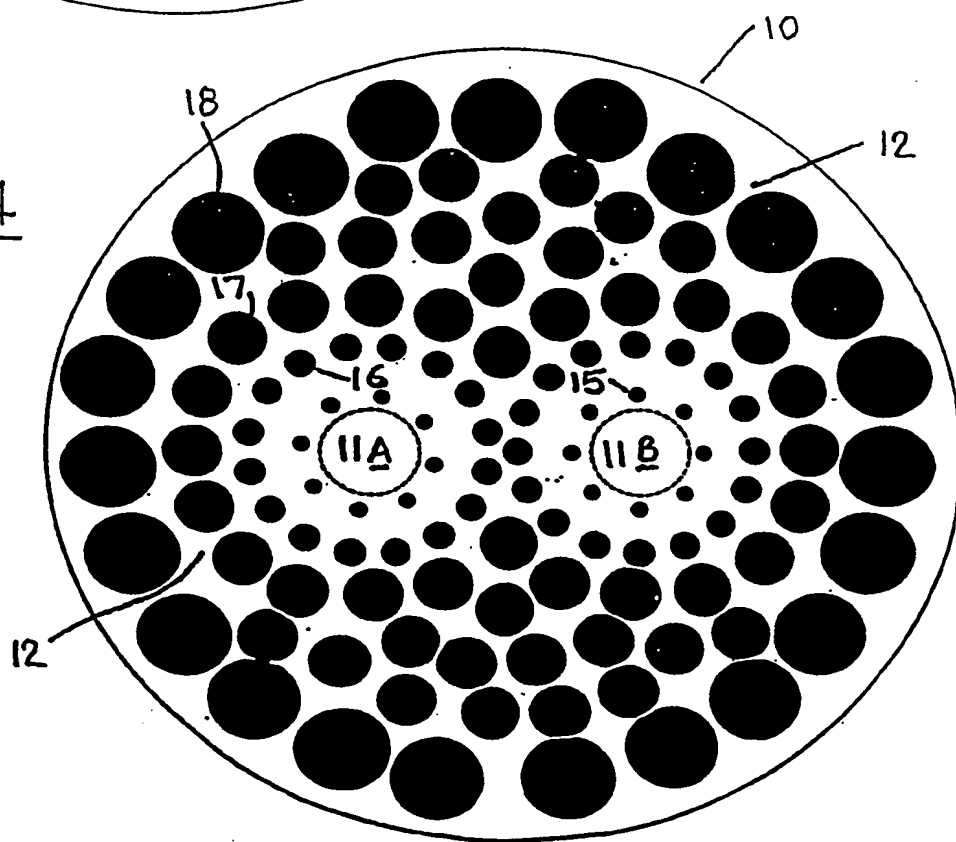

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU01/00890

**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: G02B 6/16

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

G02B 6/16, 6/17, 6/18, 6/20, 6/22

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI, JAPIO, INSPEC: Int. Cl. as above and/or keywords (photonic crystal, holey, microstructured, photonic bandgap, holes, channels; cross-section; index)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5802236 A (DIGIOVANNI <i>et al.</i> ) 1 September 1998 Col. 3 line 12 - col. 4 line 18, col. 9 line 60 - col. 10 line 12, figures 1, 4, 5	1, 3, 5, 9-11, 14
X	WO 00/49435 A (THE UNIVERSITY OF BATH) 24 August 2000 Page 10 lines 27 - page 11 line 12 and figures 3, 6	1, 2, 5, 6, 8-14
X	Patent Abstracts of Japan JP 2000-035521 A (NIPPON TELEGR & TELEPH CORP) 2 February 2000 Abstract	1, 2, 6, 7, 11

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

13 September 2001

Date of mailing of the international search report

20 SEPTEMBER 2001

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

GREG POWELL

Telephone No : (02) 6283 2308

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU01/00890

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SCIENCE, vol. 285, 3 September 1999, GREGAN R.F. <i>et al.</i> , "SINGLE-MODE PHOTONIC BAND GAP GUIDANCE OF LIGHT IN AIR", pages 1537-1539 Page 1538 col. 1&2 and figures 2, 3	1, 2, 6-9, 11-14
P, A	ELECTRONICS LETTERS, vol. 37, No. 5, 1 March 2001, SORENSEN T. <i>et al.</i> , "MACRO-BENDING LOSS PROPERTIES OF PHOTONIC CRYSTAL FIBRE", pages 287-289 * The whole document *	1-13

INTERNATIONAL SEARCH REPORT  
Information on patent family members

International application No.  
PCT/AU01/00890

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	5802236	EP	810453	JP	10095628
WO	200049435	AU	200025649	AU	200025650
JP	2000035521	NONE		WO	200049436
END OF ANNEX					

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)